


- NOTES:
1. DESIGNED FOR CLOCKWISE ROTATION (WHEN VIEWED FROM ABOVE)
 2. MAXIMUM TORQUE 3500 Nm (2580 ft-lbf)
 3. ALARM TORQUE 1700 Nm (1250 ft-lbf)
 4. CUTOFF TORQUE 2040 Nm (1500 ft-lbf)
 5. OUTPUT SPEED 0.08 RPM
 6. ESTIMATED WEIGHT 500 LBS




This drawing is property of AshtonTucker, and is transmitted in confidence. Neither the receipt nor possession confers or transfers any rights to reproduce, use, or disclose anything contained herein.

X.X \pm 0.1 [2.5 mm]
 X.XX \pm 0.03 [0.76 mm]
 X.XXX \pm 0.005 [0.13 mm]



DRAWN JKS	7/5/2017	AshtonTucker	
CHECKED			
		TITLE	
		SHAFT DRIVE UNIT	
		SIZE D	DWG NO 10227
		DO NOT SCALE	REV
		SHEET 1 OF 2	


TABLE		
FASTENER	TORQUE [IN-LB]	TORQUE [N m]
1	585	65
2	384	43
3	384	43
4	660	75
5	768	87
6	660	75
7	HAND TIGHT	HAND TIGHT

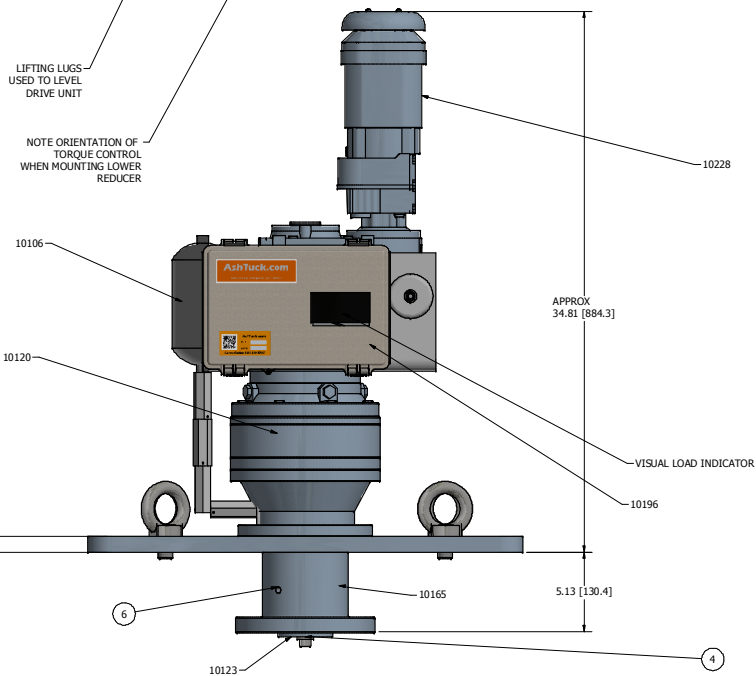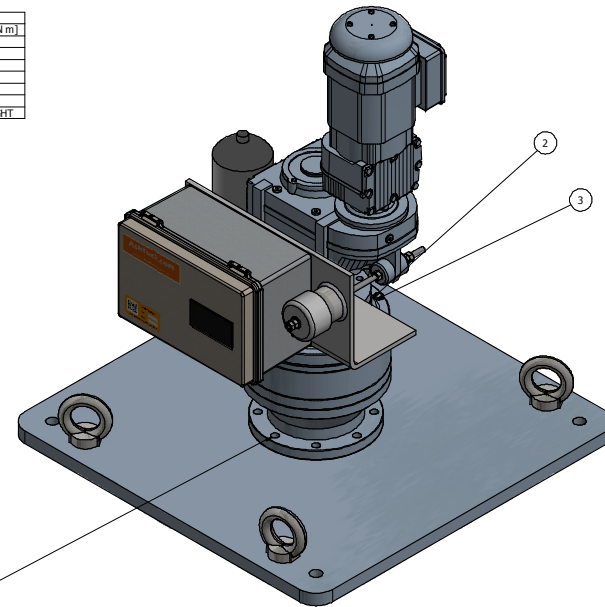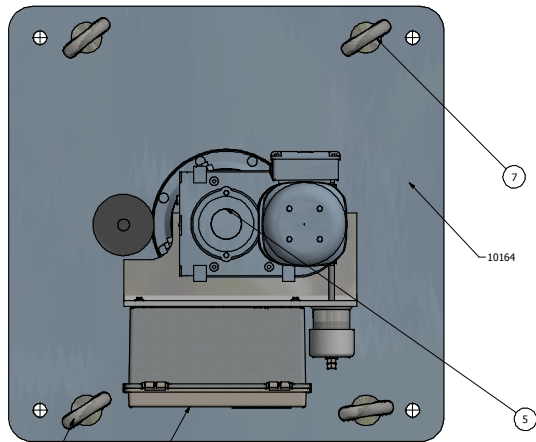

BALLONS REFER TO FASTENER KIT 10167

This drawing is property of AshtonTucker, and is transmitted in confidence. Neither the receipt nor possession confers or transfers any rights to reproduce, use, or disclose anything contained herein.

X.X ± 0.1 [2.5 mm]
X.XX ± 0.03 [0.76 mm]
X.XXX ± 0.005 [0.13 mm]



DRAWN	JKS	7/5/2017	AshtonTucker	
CHECKED				
TITLE			SHAFT DRIVE UNIT	
SIZE			DWG NO	REV
D			10227	
DO NOT SCALE			SHEET 2 OF 2	